



ART7

AsterBox™

The AsterBox™ is the interface between lights and controller. We added a CRMX transmitter to the AsterBox™. Just plug it to your DMX console and control your X-series light (AX7 etc) and other lights with CRMX technology.

The ART7 can transmit up to 512 DMX channels with the most stable wireless DMX available. Of course the new AsterBox™ still works as an interface between AsterApp™ and our lights. It's built in battery enables easy and time-saving setup, just like all our products.

Connections




In a box

- AsterBox™
- Micro USB cable
- USB Adapter
- DMX Adapter Cable
- Carrying case
- Quick Start Guide



AsterApp™



DMX console

Accessories (included)



Micro USB cable
Standard



Carrying Case
ART7-CSE






DMX Adapter
ART7-ADP

ART7

AsteraBox™

Battery:	LG Chem Battery
Runtime:	72hrs (App usage) 16h (CRMX usage)
Nominal Voltage:	3.7v
Charger Output:	5V DC-1A
Charging Time:	8hrs(from AC or high power USB port)
Wireless Frequency:	865 - 870MHz sender/receiver (EU) 902-928MHz sender/receiver (USA) 2.4GHz LumenRadio CRMX module Bluetooth module 4.0
Range: RF,	300m RF range 500m CRMX range 10m Bluetooth range
Operational Temp:	0°C - 40°C
Inactive Temp:	-20°C - 60°C
Unit Size:	L144mm x W78mm x H30mm L5.7" x W3.0" x H1.2"
Weight:	0.230kg 0.5lb
Housing:	Aluminum
Environment:	Indoor / Dry Outdoor
Humidity:	≤90%
Ports:	Micro-USB for charging 3.5" jack for DMX input

Technical drawing

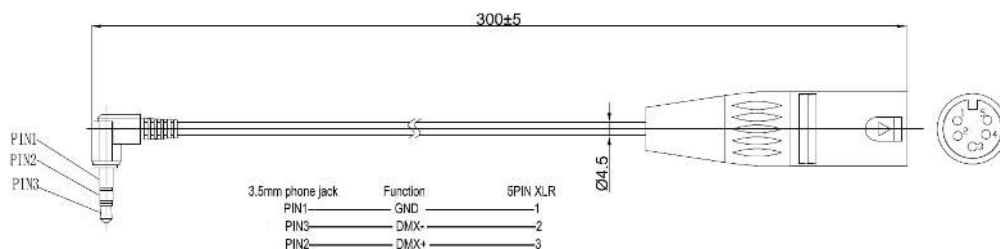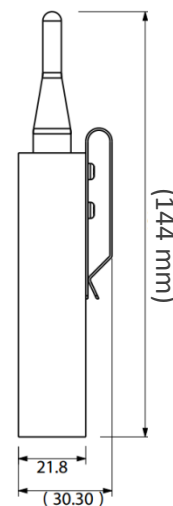

Compatible devices



AX1



AX3



AX5



AX7



AX10